


XL/7-100 process viscometer



Features

- ▶ high sensitivity over wide range
- ▶ simple tank or pipeline installation
- ▶ high on-line accuracy and repeatability
- ▶ no moving parts - no maintenance

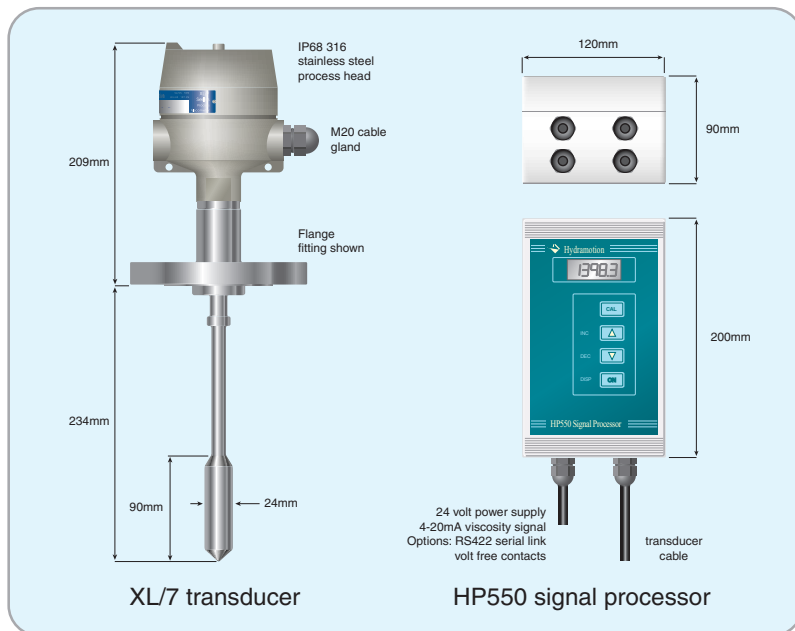

Specification

Transducer

Viscosity Accuracy:	+/- 1 % of reading
Viscosity Repeatability:	+/- 0.3 % of reading
Complete Viscosity Range:	1 to 10 ⁹ cP
*Temperature Range (sensor):	-40°C to 150°C
*Pressure Range:	up to 50 bar
Process Connection:	To suit application
Overall length:	443mm
Weight:	4 kg
Materials:	All 316 SS / Hastelloy C, optional
Environmental Rating:	IP68
Safety Certification:	Safe area

*note: Extended temperature and pressure range instruments also available

Signal Processor

Processor Unit:	HP550
Environmental Rating:	IP65
Power Supply:	24 v d.c. @ 100mA (including transducer)
Analogue Output:	4 - 20mA, fully configurable, representing either viscosity or referenced viscosity

Options:	Temperature measurement and viscosity correction to standard conditions RS232 or RS422/485 ModBus serial link 2-off volt-free contact outputs
----------	---

Hydramotion Ltd
1 York Road Park,
Malton, York,
England YO17 6YA

tel: +44 (0) 1653 600294
fax: +44 (0) 1653 693446
mail@hydramotion.com
www.hydramotion.com