



Meet the family...



HL7 process viscometer

- unlimited range
- up to 400°C
- customisable to any application



UiscoJet online viscometer

- standalone operation
- analogue and digital outputs
- connect directly to PC or DCS



ReactaUisc reaction vessel viscometer

- fits all reaction vessels
- adjustable immersion depth
- sanitary design



HL5 compact viscometer

- lightweight inline model
- hygienic as standard
- mount in any orientation



goUisc lab automation viscometer

- · exceptionally high sensitivity
- compact sensor
- small fluid volume, high throughput




Uiscolite portable viscometer

- instant readout
- independant of vessel size
- robust wipe-clean sensor



Viscosity measurement made easy

All Hydramotion viscometers have a single solid-rod sensor which measures viscosity simply by insertion. The sensor is an all-welded crevice-free construction with no seals or bearings that can wear out or fail in service.

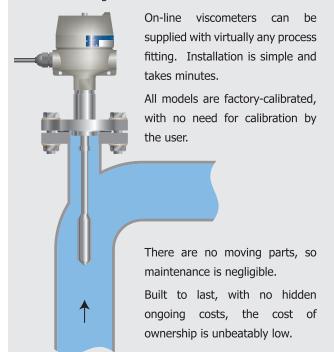

For over 20 years we have been providing solutions to the world's most difficult viscosity measurement problems. The Hydramotion name is associated with excellence, toughness and reliability.

Our instrument designs set the standard for modern process viscometry.

We can measure the viscosity of virtually any fluid in any environment, with a range of products to suit all budgets.

We like talking viscosity. Why not call us for free help and advice or to find out more

about simple, accurate, trouble-free viscosity measurement.

