


Product Data Sheet

Air Headers

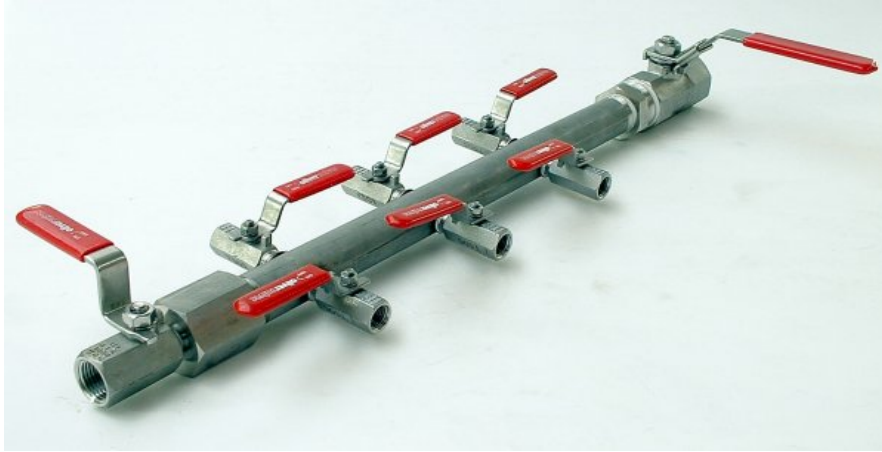


Key Features of the Air Header

- Can be configured quickly in any layout to suit application, utilising standard components
- Suitable for low pressure applications to 150 PSI
- Ball valve isolations
- Widely specified in the oil, gas and petrochemical industries for compact installations

Standard Specification

- Maximum working pressure 150 PSI
- Valve types – Ball Valves
- Maximum working temperature 200°C
- Tube – ¾" Schedule 40

General Arrangement Drawing

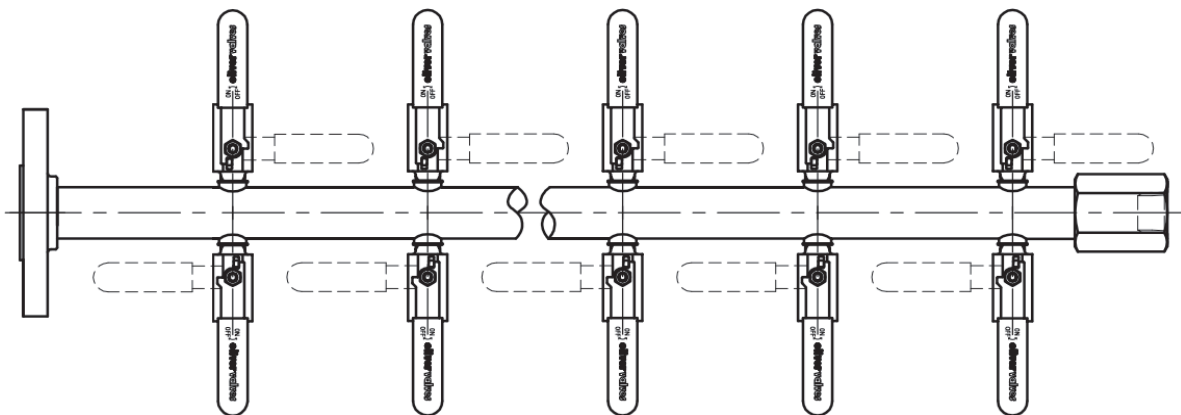

Ordering Code

(Typical example)	AH	8	S/	TWO/	50F(I)	BAH25/50S(O)	(V)	/BKTS
Air Header								
Total number of Outlet Ports								
Material Selection								
S 316S31 Stainless Steel (316)								
ONE Single Sided TWO Double Sided								
i.e. AH10S/TWO – 5 outlets down each side AH5S/ONE – 5 outlets down one side only								
Ports								
50F 1/2" (F) Connection SS								
25F 1/4" (F) Connection SS								
Standard 3/4" ports, inlet and vent.								
Ball Valves								
BAH25S 1/4" NPT Female								
BAH25/50S 1/4 - 1/2" NPT Female (ball valves are stainless steel)								
Letters In Brackets								
(I) Inlet Port								
(O) Outlet Ports								
(V) Vent Port								
Mounting								
BKTS Stainless Steel Bracket								